

Wildfire Mitigation Plan Workshop

Bear Valley Electric Service

February 19, 2020

Key Points to Take Away




- BVES developed an SB-901 and R18-10-007 compliant Wildfire Mitigation Plan (WMP) that:
 - Is tailored to our community;
 - Substantially mitigates the risk of wildfire;
 - Provides emergency response and restoration in wildfire events; and
 - Establishes an iterative process that builds on the 2019 WMP, promotes continuous improvement, and implements best practices.



Service Area




- **Location:** 32 square miles of rural and mountainous terrain at approximately 7,000 ft. in San Bernardino Mountains (80 miles East of Los Angeles).
 - Heavy tree and vegetation density
 - Mostly dry environment (80.5% of time "Very Dry" or "Dry" per NFDRS)
- Key jurisdictions: County of San Bernardino, City of Big Bear Lake, US Forest Service
- Customers: 24,427 total [22,917 residential (1,979 CARE) and 1,510 commercial]
- Electrical System:
 - Sub-transmission (34.5 kV)
 - 86.8 line miles overhead
 - 2.72 line miles underground
 - Distribution (4 kV)
 - 488.6 line miles overhead
 - 86.4 line miles underground
 - Substations: 13
 - Bear Valley Power Plant: 8.4 MW
 - Supply Lines: 39 MW total
 - Load is winter & evening peaking
 - Historical peak: 47 MW

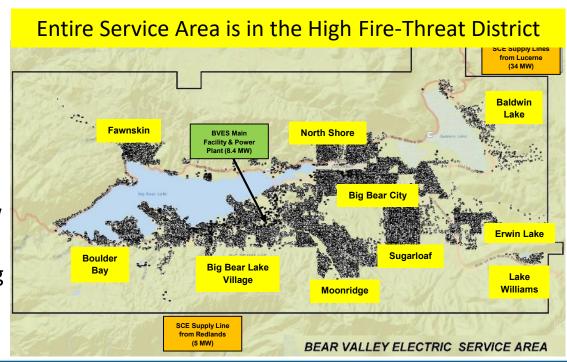


Where We Are Focused?



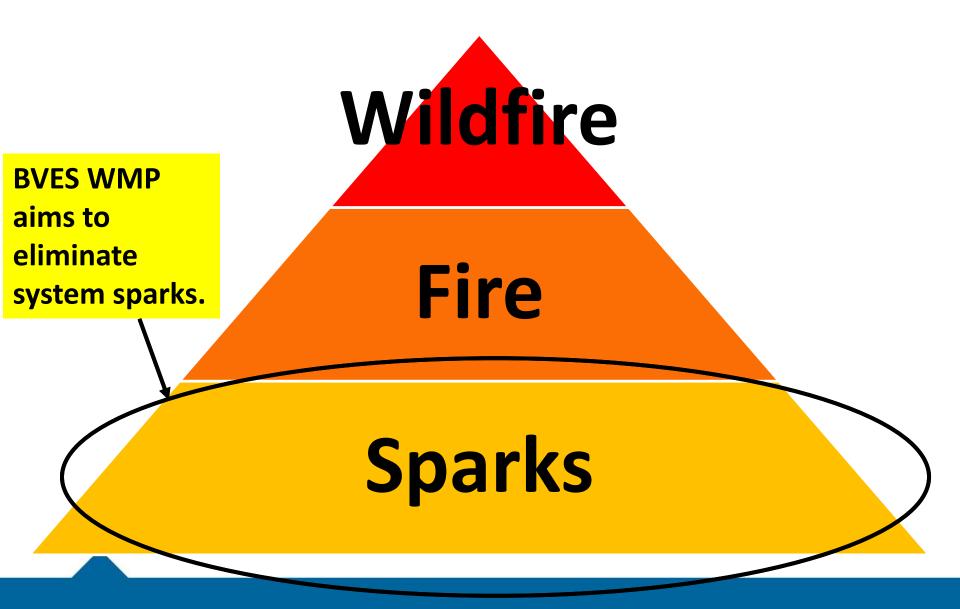

Key Considerations for Wildfire Mitigation



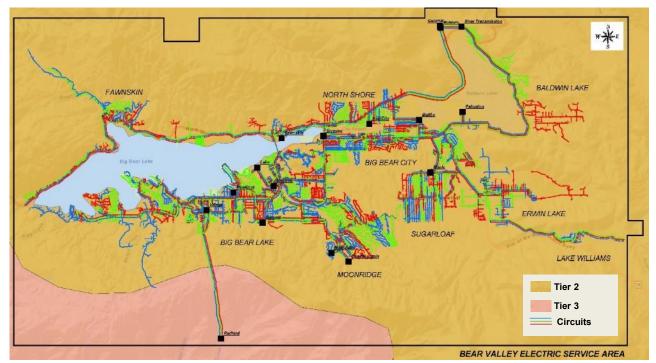

- Service Area entirely within the High Fire Threat District
 - Mostly Tier 2
 - o Some Tier 3
- WMP identifies:
 - Specific areas of higher risk for more surgical measures.
 - High risk circuits for systematic upgrades.

Elements considered in wildfire mitigation decision making:

- Electrical System Design & Assets (existing assets)
- Jurisdictional Structure (community)
- Local Load Profile (tourism and weather)
- Geographic Location and Features (elevation, vegetation, and access)

BVES Risk-Based Decision-Making Framework





Analysis focused on ongoing and potential new projects to mitigate two primary risk events:

- Utility caused wildfire results in multiple public fatalities or firefighter fatalities
- Power supply lines from SCE are de-energized for PSPS for 48 hours (or more)

Some key specific fire risk drivers mitigated in the WMP:


Vegetation contact with bare wire

Live wire down

Conventional fuse blowing

Risk-Based Prioritization



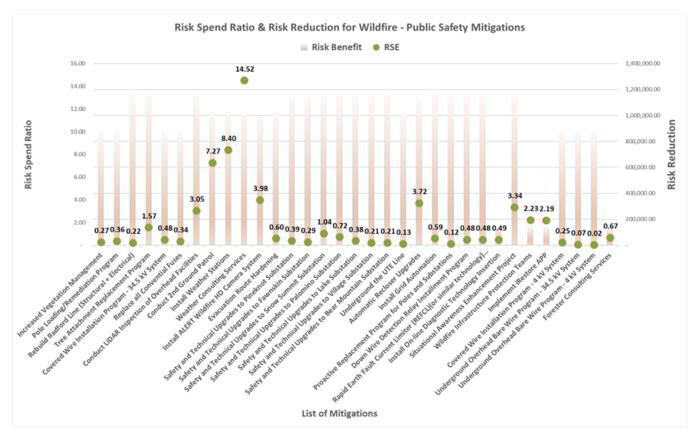


Allows applying limited resources in the most cost-effective manner with the best value return on investment



Strategy & Program Overview



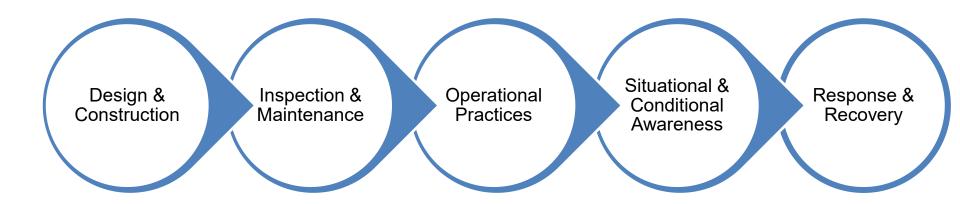

Wildfire Prevention Programs

Emergency Response & Preparedness



On track

Off track

Completed or Ongoing Program

New

Willigation Alea		
Design & Construction	 Pineknot Substation Upgrades Palomino Substation Upgrades Ute Undergrounding Energy Storage Facility Critical Infrastructure PSPS Renewable Avoidance Fuse Upgrades Tree Attachment Removal 	 Evacuation Route Hardening (pilot) Pole Loading Assess & Remediation Covered Conductor Pilot Program Radford Line Covered Conductor Project Covered Conductor Sub-transmission (All) Covered Conductor Distribution (High Risk Areas) Alternative Technologies (Down Wire Detection, REFCL, On-line Failure Detection, etc.)

In Development

	AvoidanceFuse UpgradesTree Attachment Removal	 Covered Conductor Distribution (High Risk Areas) Alternative Technologies (Down Wire Detection, REFCL, On-line Failure Detection, etc.)
Inspection & Maintenance	 GO-165 Annual On-Ground Patrol Second On-Ground Patrol (3rd Party) Electrical Equipment Preventative 	 Light Detection and Ranging (LIDAR) Inspection GIS Data Collection & Sharing Vegetation Management Plan

Inspection & Maintenance	 Second On-Ground Patrol (3rd Party) Electrical Equipment Preventative Maintenance 	 GIS Data Collection & Sharing Vegetation Management Plan Implement Forester Program
Operational Practices	 Operational Considerations/Special Work Procedures Automatic Recloser Upgrades 	 Emergency Reporting & Procedures Wildfire Infrastructure Protection Teams
Situational & Conditional	 Weather (Forecasting, Web-Based Resources, BVES-Owned Stations) GIS-Based Applications (e.g. OMS) 	 SCADA/Grid Automation Situation Awareness Enhancement (DMS Facility) iRestore App

Maintenance	• Electrical Equipment Preventative Maintenance	 Vegetation Management Plan Implement Forester Program
Operational Practices	 Operational Considerations/Special Work Procedures Automatic Recloser Upgrades 	 Emergency Reporting & Procedures Wildfire Infrastructure Protection Teams
Situational & Conditional Awareness	 Weather (Forecasting, Web-Based Resources, BVES-Owned Stations) GIS-Based Applications (e.g. OMS) Remote Monitoring (ALERTWildfire Cameras) 	 SCADA/Grid Automation Situation Awareness Enhancement (DMS Facility) iRestore App
Response &	PSPS ProtocolsPost Incident Recovery, Restoration & Ren	nediation

Operational Practices – Example




Daily National Fire Danger Rating System (NFDRS) forecast, combined with our local weather stations and our contracted meteorologist's assessments are used to set operational protocols to provide proper operational focus from reliability to fire prevention.

Operational Action	Green	Yellow	Brown	Orange	Red
Circuit Recloser Settings	Automatic Reclosing	Automatic Reclosing	Non- Automatic Reclosing	Non- Automatic Reclosing	Non- Automatic Reclosing
Patrol following circuit outage	No ¹	No ¹	Yes	Yes	Yes
TripSavers	Automatic	Automatic	Non- Automatic	Non- Automatic	Non- Automatic
PSPS	No	No	No	when w	risk" lines ind gusts an 55 mph

¹No patrol is required. Re-test allowed following check of fault indicators, SCADA, other system indicators, and reports from the field. If the re-test fails, a patrol is mandatory.

PSPS



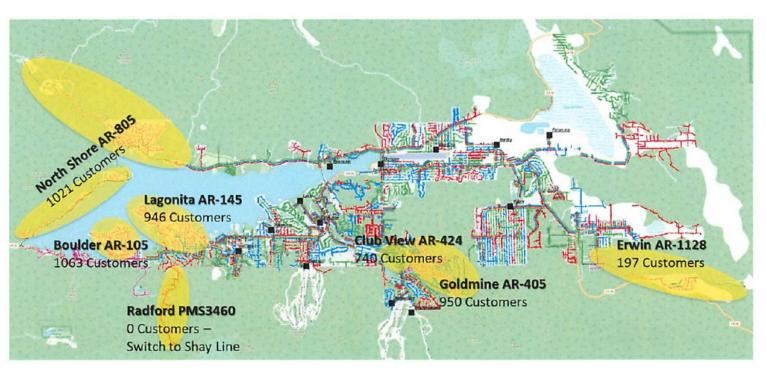

Conditional Based Actions & Notifications

- Forecasted Extreme Fire Weather
- Imminent Extreme Fire Weather
- Validated Extreme Fire Weather
- Weather Subsides to Safe Levels

We are vulnerable to SCE PSPS Actions

Circuit (AR To Be Opened)	Number of Customers		
Radford 34kV	01		
North Shore 4kV (Open AR) 805)	1,021		
Erwin 4 kV (Open AR 1128)	197		
Boulder 4kV (Open AR 105)	1,063		
Lagonita 4kV (Open AR 145)	946		
Club View 4kV (Open AR 424)	740		
Goldmine 4kV (Open AR 405)	950		

¹When this line is de-energized, the load is shifted to the Shay 34kV line.

Vegetation Management

- Program consists of:
 - Preventative Vegetation Management
 - Corrective Vegetation Clearance
 - Emergency Vegetation Clearance
- Unique local conditions, require BVES to go beyond regulated clearance standards (GO-95).
- Frequent Quality Control (QC) checks conducted by BVES managers and supervisors.





Emergency Preparedness and Response



Before Emergency

- Emergency preparations & training
- Community outreach & education
- Local government & agency meetings
- Mutual aid agreements in place

During Emergency

- EOC activation
- Emergency protocols
- Emergency communications plan & notifications
- Restoration strategies & resources


Post Emergency

- Customer service for emergencies
- Long-term emergency recovery strategy
- Regulatory reports
- CEMA if applicable

Performance Metrics



2019 BVES Metrics						
Metric Category	Metric	2019 Cycle Progress to Date / Lessons Learned				
Overall WMP	Number of utility-caused fires	0 with 1 potential "Near Miss" event in 2019 / BVES evaluated the potential near miss and determined it was not a fire threat. BVES has not experienced a wildfire during the 2019 year and therefore has no direct lessons learned to apply to future practices.				
	Number of bare line contact with vegetation	0 risks events identified in 2019.				
	Number of live wire down events	0 risks events identified in 2019.				
	Number of conventional blown fuse events	1 blown fuse event recorded in 2019.				
Infrastructure	Number of Poles Tested & Assessed	2,512 out of 8,737 poles were tested and assessed to date in this 5-year project (2018-2022) / While this activity has experienced several logistics challenges, it has steadily progressed and remains on track.				
	Number of Tree Attachments Removed	273 out 1,207 tree attachment were removed to date in this 5-year project (2018 - 2022) / This activity has presented to have additional challenges in access and resource availability. Throughout 2019, BVES predominately removed tree attachments over the summer months.				
	Length of Bare Wire Covered (Circuit Miles)	BVES is ahead of its planned goal of replacing circuit miles (three conductors over the span of one physical mile) by May 2020 / BVES also plans to press forward targeting to exceed its original goal by May, BVES understands that several utilities have experienced postponements with deploying covered conductor due to issues that range from procurement arrivals, resource adequacy, operating windows, access to rough terrain, an permitting delays. BVES is still keeping these voiced concerns in mind for future covered conductor projects.				
	Number of conventional fuses replaced by current limiting fuses or fused trip savers (vacuum style)	BVES replaced 612 out of a target of 1,602 conventional fuses with current limiting fuses and fused trip savers.				
Operations	Average Time for Clearance Permissions from Local Agencies	An averaged time was not determined over 2019, however, BVES understands that this process with permitting and permissions/siting can take up to 12 months prior to a project's construction phase. This metric will be better tracked for projected timelines to enable efficient forecasting of hurdles that may arise that are external to the utility's controls.				
Customer	Number of Customer Service Calls about Tree Trimming	0				
Service	SAIDI due to PSPS	0 / BVES has not had to initiate a PSPS event				



Metric Type		2020 BVES Program Targets					
1. Near Misses	Metric Category Progress Metrics						
	Overall WMP	Number of utility-o	#	Progress metric name	Unit(s)	Sourc	es Collection
		Number of bare lir vegetation Number of live wir Number of conver fuse events	1	Grid condition findings from inspection	Number of Level 1, 2, and 3 findings per mile of circuit in High Fire-Threat Distric (HFTD), and per total miles of circuit for each of the following inspection types: 1. Patrol inspections 2. Detailed inspections 3. Other inspections	Utilit <u>y</u> reporti	
		Assessed	2	Vegetation clearance findings from inspection	Percentage of right-of-way with noncompliant clearance based on applicable rules and regulations at the time of inspection	Utility reporti	
	Infrastructure	Number of Tree A Removed	3	Extreme weather prediction accuracy	Percentage of total PSPS predictions that are false positives or false negatives 2 days before a potential PSPS event	Utility reporti	
		Length of Bare Wi (Circuit Miles)	4	Extent of grid modularization	Number of sectionalizing devices per circuit mile and number of automated grid control equipment in: 1. HFTD 2. Non-HFTD	Utilit <u>i</u> reporti	
		Number of conver replaced by currer or fused trip saver	5	Equipment operating load above nameplate capacity	Number of circuit hours operated above nameplate capacity in HFTD areas Average % above nameplate capacity when equipment operated above nameplate capacity in HFTD areas	Utility reporti	
	Operations	Average Time for Permissions from	6	Risk-spend efficiency of resources deployed towards wildfire mitigation	Dollars per incremental life saved Dollars invested per estimated dollars of rebuilt structures avoided Dollars per customer hour of	Utility reporti	
	Customer Service	about Tree Trimm SAIDI due to PSP	7	efforts Extent of hardening across grid	PSPS avoided Percent of all grid assets in HFTD areas using proven and demonstrated wildfire-resistant equipment	Utility reporti	

Evacuation Routes





Considering the implications for evacuation routes has been part of BVES wildfire response planning.

There are only three paved routes in and out of Big Bear Lake.

Recent events in California have only further emphasized the importance of hardened and protected evacuation routes.

Evacuation Route Hardening Pilot Program

- Fire-resistant Fiber/Composite, Ductile Iron, and Light-Duty Steel Poles
- Fiberglass cross-arms
- Cladding
- Relocate Infrastructure away from routes
- Underground



Recap of Key Points to

Take Away

- BVES developed an SB-901 and R18-10-007 compliant Wildfire Mitigation Plan (WMP) that:
- Is tailored to our community;
- Substantially mitigates the risk of wildfire;
- Provides emergency response and restoration in wildfire events; and
- Establishes an iterative process that builds on the 2019 WMP, promotes continuous improvement, and implements best practices.













Questions?

